


S108-B 10-ports switch with buffer power supply for 8 IP cameras



EN**

CODE: **S108-B** v.1.0/II
TYPE: **S108-B 10-ports switch with buffer power supply for 8 IP cameras**

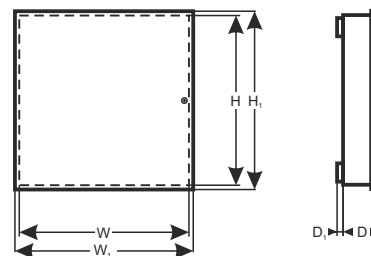

Features:

- Uninterruptible power supply of 8 IP cameras (52V DC)
- Switch 10 ports
 - 8 PoE ports 10/100Mb/s, (data and power supply)
 - 2 ports 10/100Mb/s (UpLink)
- 30W for each PoE port, supports devices compliant with the IEEE802.3af/at (**PoE+**) standard
- Approximate backup time: 5h 30min
- LED indication
- Metal enclosure – color white RAL 9003 with space for two 17Ah/12V battery
- Supports auto-learning and auto-aging of MAC addresses (1K size)
- warranty – 2 year from the production date

DESCRIPTION

The S108-B is dedicated for uninterruptible power supply of 8 IP cameras (52V DC power supply).

The main elements of this system include:

- 10 ports PoE switch
- 27,6V (PSB-1552455) buffer power supply with two 17Ah / 12V batteries
- a converter (DC/DC52230) increasing the voltage to 52V DC (supply of the PoE switch)

In case of power decay, a battery back-up is activated immediately.

The approximate backup time is given assuming that all output ports are used (using typical devices and 17Ah batteries). The electricity consumption for own needs and the energy efficiency of the power intake track were taken into account. The exact description of how to perform the calculations can be found at: "[Approximate backup time - assumptions for calculations](#)".

Automatic detection of any devices powered in the PoE/PoE+ standard is enabled at the 1 - 8 ports of the switch. The Up Link ports is used for connection of another network device e.g. recorder. The LEDs at the front panel indicate the operation status.

The switch is housed in a metal enclosure (color RAL 9003) which can accommodate a two 17Ah/12V batteries. The enclosure features a micro switch tamper indicating door opening (front panel). The S108-B is fitted with two LEDs on the front panel (red LED – indicates 230V AC power supply of the PSU, green LED indicates the presence of DC voltage).

The PoE technology ensures a network connection and reduces installation costs by eliminating the need to supply a separate power cable for each device. This method allows supplying other network devices, such as IP phone, wireless access point or router.

PARAMETERS OF THE SWITCH

Ports	10 ports 10/100Mb/s (8 x PoE + 2 x UP LINK) with connection speed auto-negotiation and MDI/MDIX Auto Cross)
PoE power supply	IEEE 802.3af/at (1+8 ports), 52V DC / 30W at each port * Used pairs 4/5 (+), 7/8 (-)
Protocols, Standards	IEEE802.3, 802.3u, 802.3x CSMA/CD, TCP/IP
Bandwidth	1,6 Gbps
Transmission method	Store-and-Forward
Optical indication of operation	Switch power supply; Link/Act; PoE Status

* The given value of 30W per port is the maximum value. The total power consumption should not exceed 96W when all PoE ports are being used.

ELECTRICAL PARAMETERS

Mains supply	176÷264V AC/50Hz
Current up to	1A/230VAC max.
Supply power	110W
Output current at the PoE ports (RJ45)	8 x 0,6A $\Sigma I=2A$ (max.)
Output voltage at the PoE ports (RJ45)	52V DC
Short-circuit protection SCP and overload protection OLP	105% ÷ 150% PSU power, automatic recovery (the fault requires disconnection of the DC output circuit)
PSU current consumption	250mA/27,6VDC
Battery charge current	0,5A max. /2x17Ah (+/-5%)
Approximate backup time	5h 30min
Battery circuit protection SCP and reverse polarity connection	melting fuse
Deep discharge battery protection UVP	U<19V ($\pm 5\%$) – disconnection of the batteries
Sabotage protection: - TAMPER output indicating enclosure opening	- microswitch, NC contacts (enclosure closed), 0,5A@50V DC (max.)

MECHANICAL PARAMETERS

Dimensions	W=397, H=350, D+D ₁ =92+8 [+/- 2mm] W ₁ =402, H ₁ =355 [+/- 2mm]
The dimensions of the battery compartment	370 x 180 x 80mm (WxHxD) max
Gross/Net weight	4,8 / 5,1 kg
Enclosure	Steel plate, DC01 1,0mm color white RAL 9003
Closing	Cheese head screw x 2 (at the front), (lock assembly possible)
Connectors	Power supply of the cameras: RJ45 socket 230VAC input: Φ 0,63-2,50 (AWG 22-10), Battery output BAT: 6,3F-2,5 TAMPER output: wires
Notes	The enclosure does not touch the assembly surface so that cables can be led.