

DS-3E0508D-O 8-Port Gigabit Plastic Switch

DS-3E0508D-O provides  $8\times10/100/1000$  Mbps Ethernet ports which support line speed forwarding. With simple and mini exquisite body, the switch is plug and play and easy to use, suitable for home, school, dormitory, office, small monitoring and other simple network environments.

- 8 x 10/100/1000 Mbps ethernet ports
- Supports ADI/ADIX
- Store-and-forward switching
- Supports MAC address auto-learning and aging
- Simple, compact body design
- Supports desktop and wall-mounting
- Plug & play, easy to use




## Specification

	Model	DS-3E0508D-O
Network Parameters	Ports	8 × Gigabit RJ45 port
	MAC Address Table	4 K
	Switching Capacity	16 Gbps
	Packet Forwarding Rate	11.90 Mpps
	Internal Cache	1.5 Mbits
	Shell	ABS
	Net Weight	0.093 kg (0.205 lb)
	Gross Weight	124.00 mm × 25.00 mm × 61.00 mm (4.88" × 0.98" × 2.40")
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
General	Storage Temperature	–40 °C to 85 °C (–40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	5 V DC, 1 A
	Installation Mode	Desk-Mounted
Approval	EMC	FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC
		61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN
		55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020)
	Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition),
		CE-LVD (EN 62368-1: 2014+A11: 2017)
	Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)

### Available Model


DS-3E0508D-O

## Typical Application

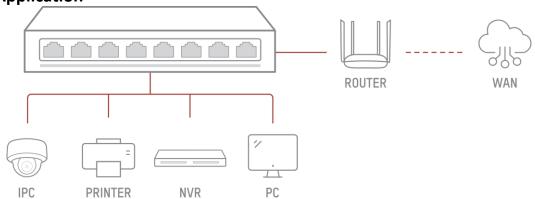




# Physical Interface

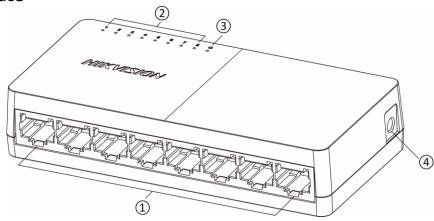



No	э.	Indicator/Port	Description
1		Gigabit RJ45 Port	Used for connection to another device via a network cable.
(2		LINK/ACT Indicator	Indicates the statuses of Gigabit RJ45 ports 1 to 8.
(3		PWR Indicator	Indicates the power status of the switch.
4	)	Power Supply	Use the attached power adapter or power cord to connect the switch to a socket.




#### Dimension






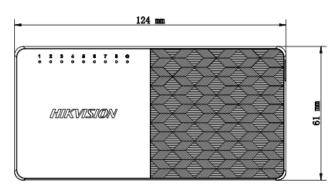





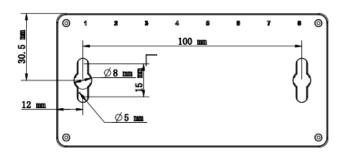

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T+86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ





