easyPack

prewired beam tower ready to be installed











EFICIENT
Say bye to
installation mistakes





easyPack components

TAMPER ___

Warns of any attempt to manipulate the tower. For wall mounted towers, 2 units are included, one per each side. It contains a connector to fix the anti-climbing tamper switch.



Tx-Rx MOTHERBOARD ___

Manage every Rx/Tx in the tower as well as all the peripherals (heater, tamper and fan) to avoid condensation, it includes a thermostat that activates the heaters and the fan, if so configured, in case of low temperatures. Includes alarm, antisabotage tamper and anti-climb tamper outputs and photoelectric beams environmental disqualification output.



HEATER 12/24

One heater is included per each Rx/Tx that the tower contains.

There are 3 available configurations:

12V – 250mA – 3W Uses just one resistance.


12V - 500mA - 6W Uses two resistances.

24V - 250mA - 6W Uses two resistances.



FAN (optional)

Configurable to operate at low temperatures with the heaters, in order to help avoiding the condensation, or to operate at high temperatures making the air circulate and thus improving equipment performance.




POWER SUPPLY (optional)

Power supply with battery charger output.






easyPack accessories

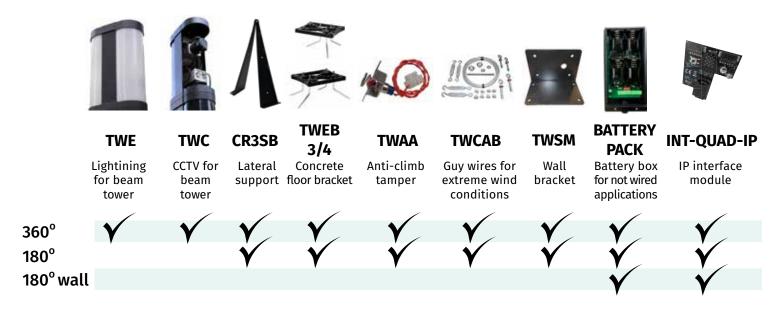

easyPack references

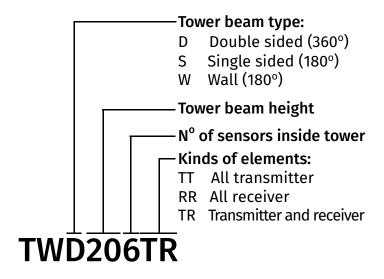

| sided | Reference | Height | Angle | Tx | Rx |
|----------|-----------|--------|-------|----|----|
| | TWD204RR | 2m | 360° | - | 4 |
| | TWD204TT | 2m | 360° | 4 | - |
| | TWD204TR | 2m | 360° | 2 | 2 |
| | TWD206RR | 2m | 360° | - | 6 |
| | TWD206TR | 2m | 360° | 6 | - |
| S: | TWD206TT | 2m | 360° | 3 | 3 |
| | TWD304RR | 3m | 360° | - | 4 |
| þ | TWD304TT | 3m | 360° | 4 | - |
| - Double | TWD304TR | 3m | 360° | 2 | 2 |
| | TWD306RR | 3m | 360° | - | 6 |
| | TWD306TT | 3m | 360° | 6 | - |
| | TWD306TR | 3m | 360° | 3 | 3 |
| | TWD308RR | 3m | 360° | - | 8 |
| | TWD308TT | 3m | 360° | 8 | - |
| | TWD308TR | 3m | 360° | 4 | 4 |
| ١. | | | | | |

| One side — | | TWS202RR | 2m | 180° | - | 2 |
|------------|----------|----------|----|------|---|---|
| | | TWS202TT | 2m | 180° | 2 | - |
| | | TWS203RR | 2m | 180° | - | 3 |
| | ט 3 | TWS203TT | 2m | 180° | 3 | - |
| | <u>-</u> | TWS302RR | 3m | 180° | - | 2 |
| | | TWS302TT | 3m | 180° | 2 | - |
| | = | TWS303RR | 3m | 180° | - | 3 |
| |) | TWS303TT | 3m | 180° | 3 | - |
| | | TWS304RR | 3m | 180° | - | 4 |
| | | TWS304TT | 3m | 180° | 4 | - |

| | TWW202RR | 2m | 180° | - | 2 |
|------|----------|----|------|---|---|
| Wall | TWW202TT | 2m | 180° | 2 | - |
| | TWW203RR | 2m | 180° | - | 3 |
| | TWW203TT | 2m | 180° | 3 | - |
| | TWW302RR | 3m | 180° | - | 2 |
| | TWW302TT | 3m | 180° | 2 | - |
| | TWW303RR | 3m | 180° | - | 3 |
| | TWW303TT | 3m | 180° | 3 | - |
| | TWW304RR | 3m | 180° | - | 4 |
| | TWW304TT | 3m | 180° | 4 | - |
| | | | | | |