

PS series power supply

Enclosed, 124VDC switch mode power supply

CODE: PS-15012100

EN/IX

TYPE: PS 12V/10A enclosed switch mode power supply



Features of the power supply unit:

- power output 10A/12÷15VDC*
- wide AC input voltage range 176÷264V
- high efficiency 83%
- LED optical signalisation
- protections:
 - SCP short-circuit protection
 - overvoltage OVP
 - overvoltage protection
 - overload (OLP)
- warranty – 2 year from the production date

DESCRIPTION

The power supply unit is intended for 230V AC mains supply to alarm system devices, which require **12V DC** voltage and current efficiency of **I=10A**. The design enables simple changing of the output voltage, within the range of **12V÷15V DC**, using a potentiometer. The power supply unit is protected against a short circuit, an overload, a surge or over voltage.

SPECIFICATION

Supply voltage	176 ÷ 264 V AC
Current consumption	1,1A@230VAC max.
PSU power	150W max.
Efficiency	83%
Output voltage	12V DC
Output current $t_{AMB} < 30^{\circ}\text{C}$	10A - see chart 1.
Output current $t_{AMB} = 40^{\circ}\text{C}$	7A - see chart 1.
Voltage adjustment range	12 V ÷ 15V DC
Ripple voltage	100mV p-p max.
Short-circuit protection SCP	electronic (activation requires disconnecting the load or supply for about 5 s.)
Overload protection OLP	105-150% of the PSU power (activation requires disconnecting the load or supply for about 5 s.)
Surge protection	varistors
Over voltage protection OVP	>16V (activation requires disconnecting the load or supply for about 20 s.)
LED indication	green LED – presence of DC voltage
Operation conditions	2-nd environmental class, temperature: $-10^{\circ}\text{C} ÷ 40^{\circ}\text{C}$ relative humidity 20%...90%, without condensation
Dimensions (LxWxH)	199 x 110 x 50 [mm]
Net/gross weight	0,73kg / 0,78kg
Protection class PN-EN 60950-1:2007	I (first) – requires a protective conductor (PE)
Connectors	power-supply: $\Phi 0,63-2,50$ (AWG 22-10) outputs : $\Phi 0,63-2,50$ (AWG 22-10)
Declarations, warranty	CE, RoHS, 2 year from the production date

* In order to extend the life of the power supply, the load current of 7A is recommended.

* See graph 1.

PS series power supply



Enclosed, 12VDC switch mode power supply

Temperature characteristics.

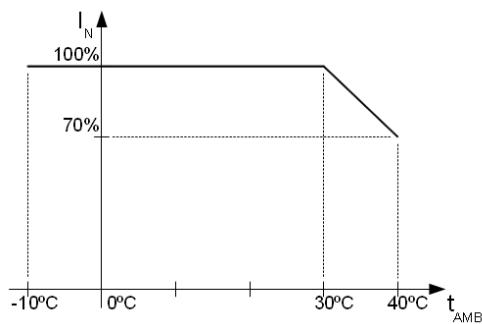


Chart 1.

Acceptable output current from the PSU
depending on ambient temperature
(instantaneous load).

Dimensions and fitting of the PS-15012100 power supply

