

PNM-9000QB

2MP x 4CH Remote Head Camera



Key Features

- 2MP x 4CH
- HDMI - Single/Quad view support
- WDR 120dB, WiseStreamII
- Defocus detection, directional detection, motion detection etc
- Max 30fps@2MP
- H.265, H.264, MJPEG
- Compatible with SLA-T4680A/T4680VA, SLA-T2480A/T2480VA, SLA-T1080FA



Compatible lenses



SLA-T2480



SLA-T2480V



SLA-T1080F



SLA-T4680



SLA-T4680V

Video	
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: 2MP Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Video Out	HDMI(1920x1080, Single/Quad view)
Lens	
Optional Lens	SLA-T1080FA, SLA-T2480A, SLA-T2480VA, SLA-T4680A, SLA-T4680VA
Operational	
Camera Title	Displayed up to 85 characters
Day & Night	Auto(Electrical)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR V
Digital Image Stabilization	Support
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90 ° /270 °)
Analytics	Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line
Alarm I/O	Input 2ea / Output 2ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC at event triggers Alarm output
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
Network	
Ethernet	RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz

Smart Codec	Manual (Sea area), WiseStream II
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast (20 users) / Multicast Multiple streaming (Up to 12 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP
Security	HTTPS (SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication (EAP-TLS, EAP-LEAP) Device Certificate (Hanwha Techwin Root CA)
Application Programming Interface	ONVIF Profile S/T SUNAPI (HTTP API)

General

Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Edge Storage	Micro SD/SDHC/SDXC 2slot [256 X 2 GB]
Memory	4GB RAM, 512MB Flash

Environmental & Electrical






Operating Temperature / Humidity	-10°C ~ +45°C (-40°F ~ +113°F) / Less than 95% RH (Non condensing)
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Input Voltage	PoE+ (IEEE802.3at, Class4), 12VDC
Power Consumption	PoE : Max 22.00W, Typical 16.70W DC : Max 19.00W, Typical : 14.00W

Mechanical

Color / Material	White / Plastic
RAL Code	RAL9003
Product Dimensions / Weight	200(W)x37(H)x146(D)mm / 715g

- The latest product information / specification can be found at hanwha-security.com
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

NO	PART NAME	CODE NO.	MATERIAL	Q'TY	REMARK
1	ASSY, FINAL-05, PNM-9000QB	074625	Check note	1	-

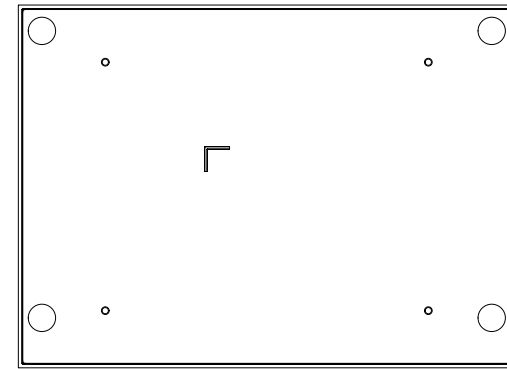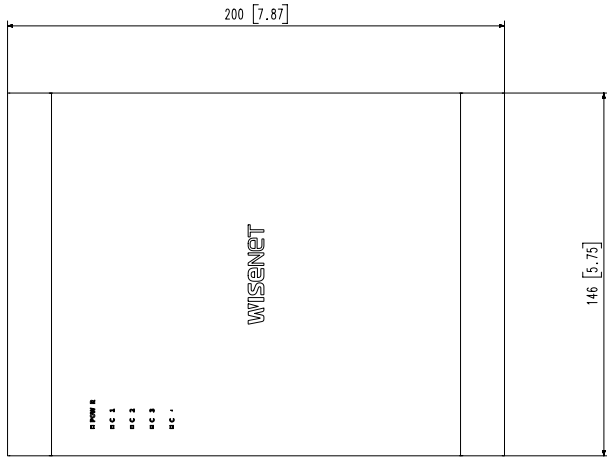

A1

1	PNM-9000QB	2020.08.26
No.	MODEL NAME	DATE
Unit:mm [inch]	SCALE:1/1	© Hanwha Techwin