

# SPA-S1000

IP Audio Server



## Key Features

- System Expansion: Up to 512 speakers
- Supported Protocol: IPv4, HTTP, HTTPS, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP, SNMP(v3)
- TTS: English(US, UK), German, French, Spanish, Russian
- Ethernet: 100/1000 Base-T

# SPA-S1000

IP Audio Server



## Specifications

### Product

IP Audio Type	IP Audio Server
---------------	-----------------

### Network

Ethernet	10/100 Base-T
----------	---------------

### General

Operating Temperature	-10°~+40°C (-14°F~+104°F)
Operating Humidity	10~85%RH(Non-Condensing)
IP Code	N/A

### Network Protocol

Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
---------------------	--

### System Integration

Application Programming Interface	SUNAPI(HTTP API)
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH), UP to 512 Zone Control (Multicast), Up to 20 Zone Control (Unicast), Up to 255 Groups
Functional Monitoring	Connection verification, Built-in system logging


# SPA-S1000

IP Audio Server



## CAD

Unit: mm [inch]

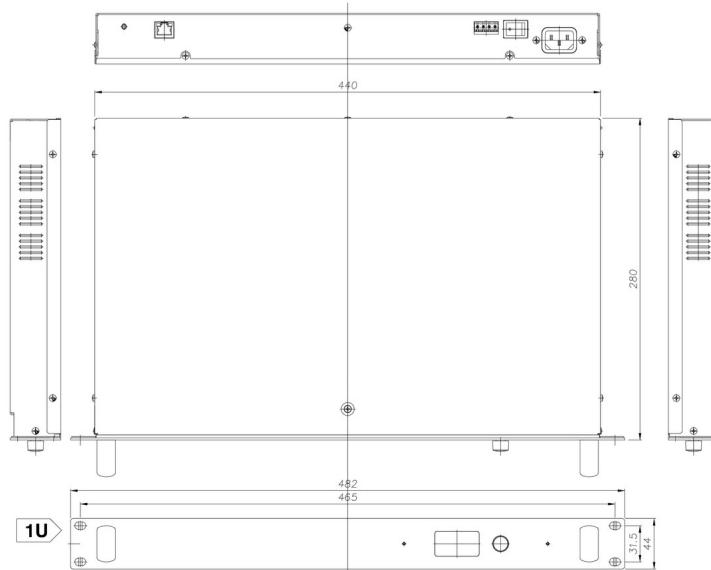

3	MODEL2	
2	MODEL1	
1	SPA-S1000	'22.7.15
No.	MODEL NAME	DATE
Unit: mm [inch]		SCALE:1/1

© Hanwha Techwin Co.,Ltd. All rights reserved. © Hanwha Techwin