

# SMT-4933

49" UHD LED Monitor




## Key Features

- Support up to 3,840 x 2,160 resolution
- High contrast ratio 4,700:1
- Fast response time 8ms
- Temperature sensor, 24/7 (50,000 hour), FHD 4 picture by picture support

## Dimensions

Unit: mm (inch)

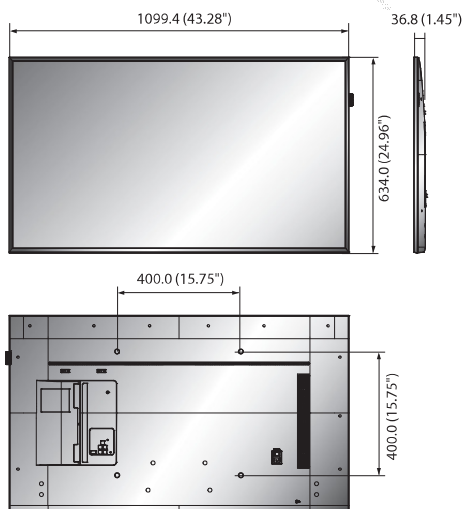

## SMT-4933

DISPLAY		
Type	LED	
Screen Size	49"	
Max. Resolution	3,840 x 2,160	
Brightness	500cd/m <sup>2</sup>	
Contrast Ratio	4,700:1	
Aspect Ratio	16:9	
Viewing Angle (H/V)	178° / 178°	
Display Color	16.7million	
Response Time	8ms	
Operation Hour	24 / 7	
Panel Life	50,000hours	
Haze	25%	
DISPLAY		
Dynamic C/R	Mega	
H-Scanning Frequency	30 ~ 81KHz	
V-Scanning Frequency	48 ~ 75Hz	
Maximum Pixel Frequency	148.5MHz	
SOUND		
Speaker Type	Built-in speaker (10W + 10W)	
CONNECTIVITY		
Input	RGB	DVI-I (D-Sub common), Display port 1.2 (2)
	Video	HDMI(4)
	Audio	Stereo mini jack
	USB	USB (S/W update only)
Output	Audio	Stereo mini jack
External Control		RS-232C (in / out), RJ-45
External Sensor		IR
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (±10%) (50/60Hz)
	Power Consumption	100 (Typical), 140 (Rating), 154 (Max)
	Sleep Mode	less than 0.5W
	Off Mode	less than 0.5W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	10% ~ 80% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	1195.0 x 721.0 x 177.0mm (47.05" x 28.39" x 6.97")
	Dimensions without Stand (WxHxD)	1099.4 x 634.0 x 36.8mm (43.28" x 24.96" x 1.45")
	Bezel Size	Top 11.0mm (0.43") / Side 11.0mm (0.43") / Bottom 12.0mm (0.47")
	Weight / Package	13.4Kg (29.54 lb) / 17.9Kg (39.46 lb)
	Rack Mounts	Optional
	VESA Mounts Interface	400 x 400mm
Special	H/W	Temperature sensor, Pivot display, Clock battery (80hrs clock keeping), Built-in speaker (10W 2CH), IP5x
	S/W	FHD 4 PBP support (2 / 3 / 4 PBP), Auto source switching & recovery, LFD home UI, Button lock, DHCP with RJ45 MDC, Hot key option, Plug & play (Initial setting)
CERTIFICATION		
Safety	60950-1	
EMC	Class A	
Environment	ENERGY STAR 7.0 (USA)	
ACCESSORIES		
Included		Quick setup guide, Warranty card, Power cord, Remote controller, Batteries
Optional	Stand	STN-L4655E
	Mount	WMN4270SD
	Media Player	SBB-DA/DI

\* The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)