

DS-D5055UL 55" LCD Monitor

key Features


- Support 8bit/10bit 2-ch LVDS(1920×1080) HD display;
- Adopt 3-D digital comb filter;
- Support audio output;
- True color OSD and user-friendly operation menu;
- 1 channel HDMI 1.3 input interface, support HDCP 1.2;
- Adopt 3D noise reduction technology;
- Support high definition JPEG decoding;
- Programmable 12-bit RGB gamma correction technology;
- Support software spread-spectrum technology to reduce EMI radiation;
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge;
- Support USB2.0 interface; support U disk, mobile hard disk, MP3, USB card reader, etc.



Model:

DS-D5055UL

Dimension:

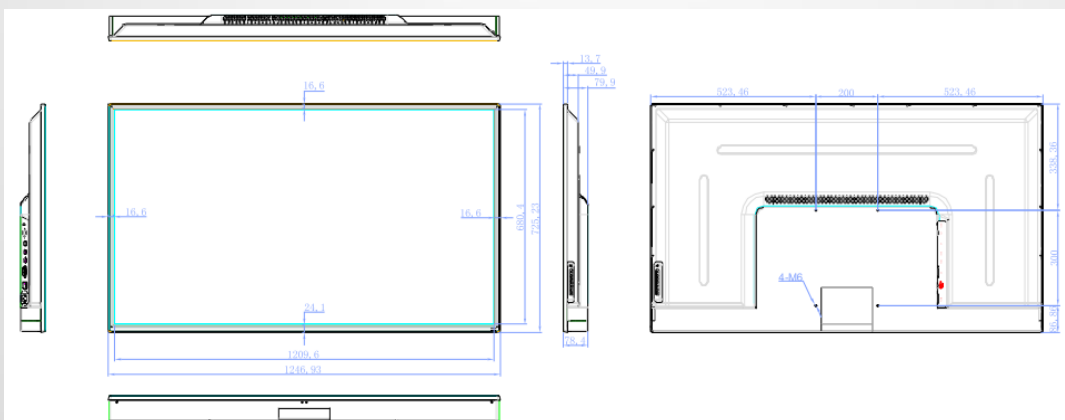

DS-D5055UL 55" LCD Monitor



| | | |
|--|---|---|
| Model | DS-D5055UL | |
| Display Type | TFT-LED Backlight | |
| Screen Size | 54.64" | |
| Dot Pitch (H×V) | 0.42mm*0.315mm | |
| Resolution | 3840 × 2160 | |
| Brightness | 360cd/m ² | |
| Contrast | 1200:1 | |
| Response Time | 6ms | |
| Color | 1.06B | |
| Viewable Area (H×V) | 1209.6 mm×680.4mm | |
| Viewing Angle | Horizontal 178°, Vertical 178° | |
| Interfaces | VGA Input | 1 |
| | HDMI Input | 2 |
| | DP Input | 1 |
| | DVI Input | 1 |
| | PC AUDIO-IN | 1 |
| Power Supply | 100 ~ 240V AC, 50/60Hz | |
| Power Consumption | ≤ 120W(Normal working), ≤ 0.5W(Standby) | |
| Power Consumption of Built-in MIC | 10W*2 | |
| Operation Temperature | 5°C ~ 40°C (41°F ~ 104°F) | |
| Operating Humidity | 10%~85% | |
| Storage Temperature | -20°C ~ 55°C (-4°F ~ 131°F) | |
| Storage Humidity | 5%~95% | |
| Dimension | 1246.93mm × 725.23mm × 79.9mm | |
| Width of Frame(T/B/L/R) | 16.6 × 24.1 × 16.6 × 16.6mm | |
| Screw Aperture | M6 200mm*300mm | |
| Weight | 15Kg | |