

Foot-operating button • Series 485

- Operated by lifting the foot tip
- Silent operation
- Protection against opening
- Version with LED memory

Foot-operating button silently actuated by slightly raising the foot. The internal reed contact is designed for NC operation. The mechanically high-resistance steel case is self-protected against opening.

Version 485-I is equipped with self-retaining pedal.

To reset, a specific key included in the package is necessary (keys are different for each product).


General specifications

Housing material	Sheet steel, epoxy grey painting
Front material	Sheet steel, epoxy white painting
Operation	NC reed contact
Type of connection	Terminals
Operating temperature	-15°C÷+55°C
IP Degree	IP 40
Standard equipment	Set with 2 reset keys (excluding 485-ME)
Packaging	1 pc. / package



4-terminal connection: 2 for contact and 2 for anti-tampering. Version 485-ME: LED memory with central reset (by cutting power supply).

6-terminal connection: 2 for contact, 2 for anti-tampering, 2 for 12 Vdc power supply.

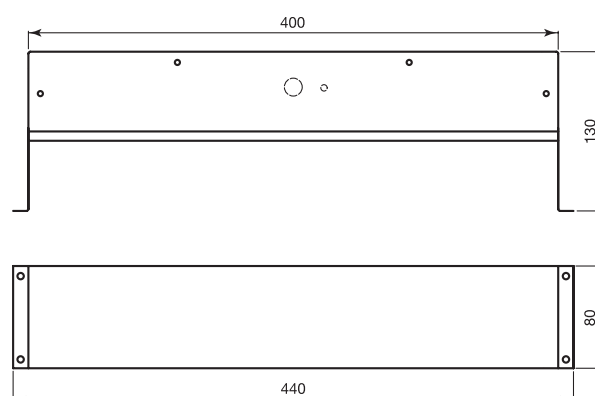

Order codes

Code	Connection type	Max voltage	Max current	Max power	Power supply	LED memory	Connections	Package weight	Notes
485-I	NC	75 Vdc	1 A	10 W	-	No	4 terminals	1,92 Kg	Key reset
485-ME	NC	75 Vdc	1 A	10 W	12 Vdc - 10 mA	Yes	6 terminals	1,75 Kg	Central reset

Accessories available

CSA06632 | Spare key for 485-I

