

## DS-QAE0A60G1-VB 60 W Analog Amplifier



- Support four types of audio input: Bluetooth, USB flash drive, microphone, and RCA, with flexible and convenient operation
- Built-in Bluetooth module, support fast Bluetooth playback
- Support plugging in the USB flash drive to play audio sources
- Support independent microphone volume control and two-channel partition volume control
- Support two-channel audio mixing output
- Adopt high-strength engineering plastics, sturdy and durable
- Integrated functional design, convenient and reliable



## ▪ Specification

Audio	
Rated Power	60 W 24 VDC
Frequency Response	USB, Bluetooth: 20 Hz to 20 kHz MIC, RCA Input: 20 Hz to 8 kHz
THD and SNR	THD: ≤1% SNR: ≥100 dB
Interface	
Audio In	6.5 mm Microphone × 1 USB 2.0 × 1 RCA × 1 Bluetooth
Audio Out	Constant Voltage Output × 2 , 100 V COM Constant Resistance Output × 2 , 30 W 4 Ω to 8 Ω RCA Input × 1 RCA Cascading × 1 Bluetooth
LED Indicator	Power indicator (solid white): the device is normally working USB flash drive indicator (solid white): the device is in USB mode Bluetooth indicator (solid blue): the device is in Bluetooth mode
Volume Knob	MIC Volume Knob × 1 , Partition 1 Volume Knob × 1 , Partition 2 Volume Knob × 1
USB	USB2.0
General	
Material	Plastic
Dimension	190.8 mm × 230.8 mm × 51.2 mm (7.48" × 9.06" × 2.01")
Package Dimension	362 mm × 280 mm × 100 mm (14.25" × 11.02" × 3.94")
Weight	Approx. 1445.5 g (3.19 lb.)
With Package Weight	Approx. 2113.3 g (4.66 lb.)
Color	White
Packing List	Device × 1 Power Adapter × 1 Power Cord × 1 Regulatory Compliance and Safety Information × 1
Operating Temperature	-10 °C to 55 °C(14 °F to 131 °F)
Operating Humidity	< 90% (No condensation)

## ▪ Available Model

DS-QAE0A60G1-VB

## ▪ Dimension

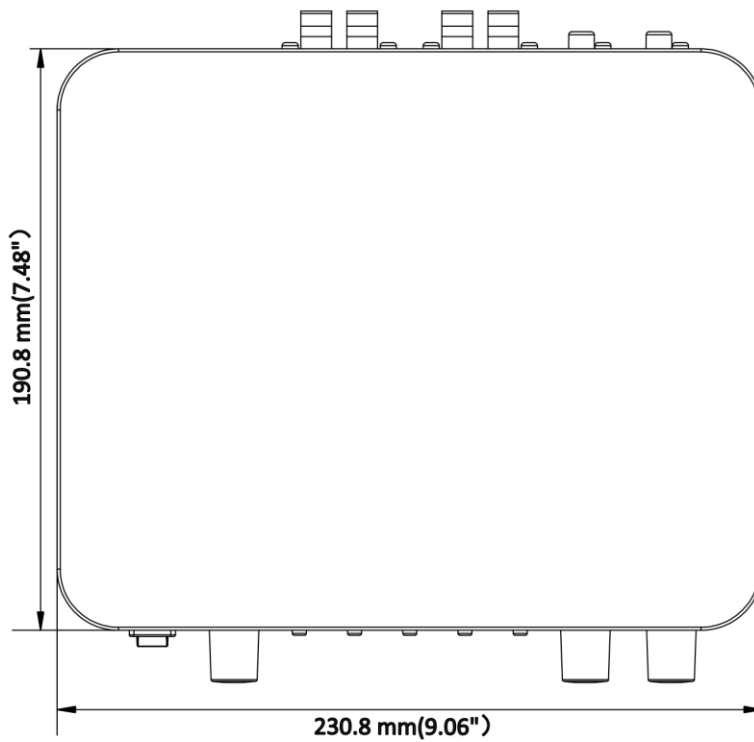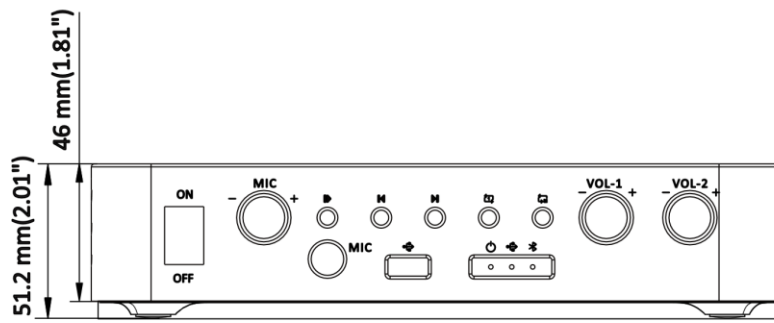

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

